

USER MANUAL



⚡ FUZZISMO ⚡

**IS AN OVERLOAD EXPERIMENTAL
FUZZ-DISTORTION GUITAR EFFECTS
STOMPBOX, WITH COMPRESSOR/
SUSTAINER, OVERDRIVEN BY A
VACUUM TUBE AMP.**

AT MAX IT CAN SELF-OSCILLATE.

**FUZZISMO HOPES TO GIVE ALL THE
FUZZFREAK FUZZISTS OUT THERE A
NEW FUZZ PHILOSOPHY.**



FUZZISMO

TUBE

OD

CHOKE


RATIO



THRUST




RATIO

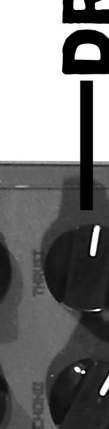

DRIVE

**TOGGLE
SWITCH**



FILTER


**LEFT
FOOTSWITCH**



**RIGHT
FOOTSWITCH**



**ANTI -
FASCIST
FUZZIST
PEDAL**

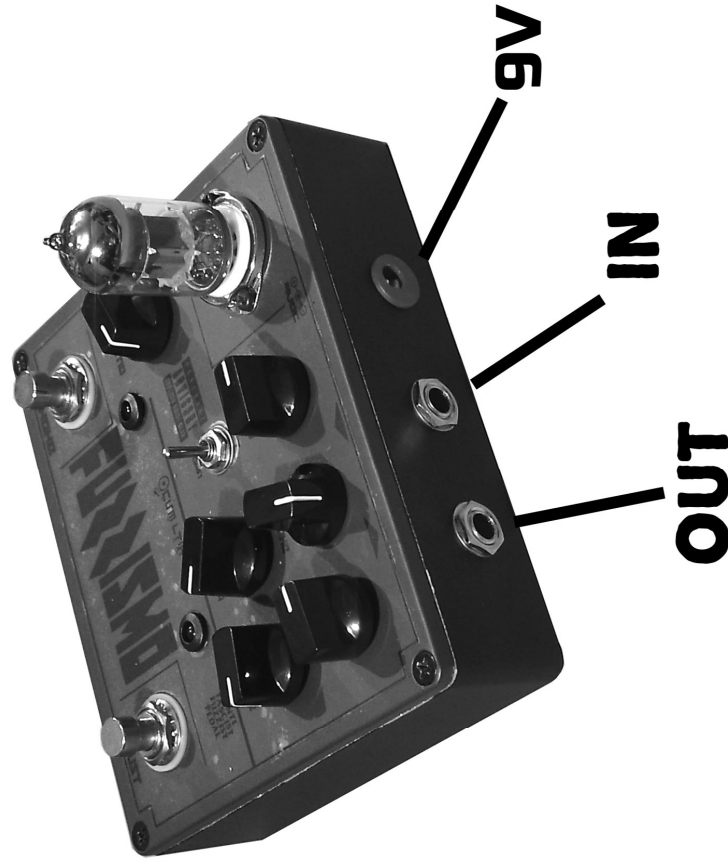

9V

IN


OUT

★ **CONTROLS** ★

1. **OD:** Over Dose the sound with another layer of drive and grittiness effect that comes from the vacuum tube's warmth saturation.
2. **CHOKE:** Output volume for the compressor/sustainer side. Turn clockwise for more tinnitus effect.
3. **THRUST:** Output volume for the fuzz-distortion and tube amp side. Turn center dial if you are a "fuzzifier".
4. **RATIO:** Is a bias knob. It set the amount of choking. More compression, more sustain and boost effect. Full choking can result to shut down the sound.
5. **Left Footswitch (Choke):** Activates the compressor.
6. **TOGGLE SWITCH:** Gain is regular gain. Lift is +200 gain.
7. **FILTER:** Counter-clockwise will make your sound sharp and bright, clockwise will make your sound darker.
8. **Right Footswitch (Thrust):** Activates the fuzz-distortion.
9. **DRIVE:** Set the amount of thrusting. This knob controls the first stage of fuzz and distortion. Full clockwise for more maximum gain thrust and oscillation.



FUZZISMO SIGNAL FLOW

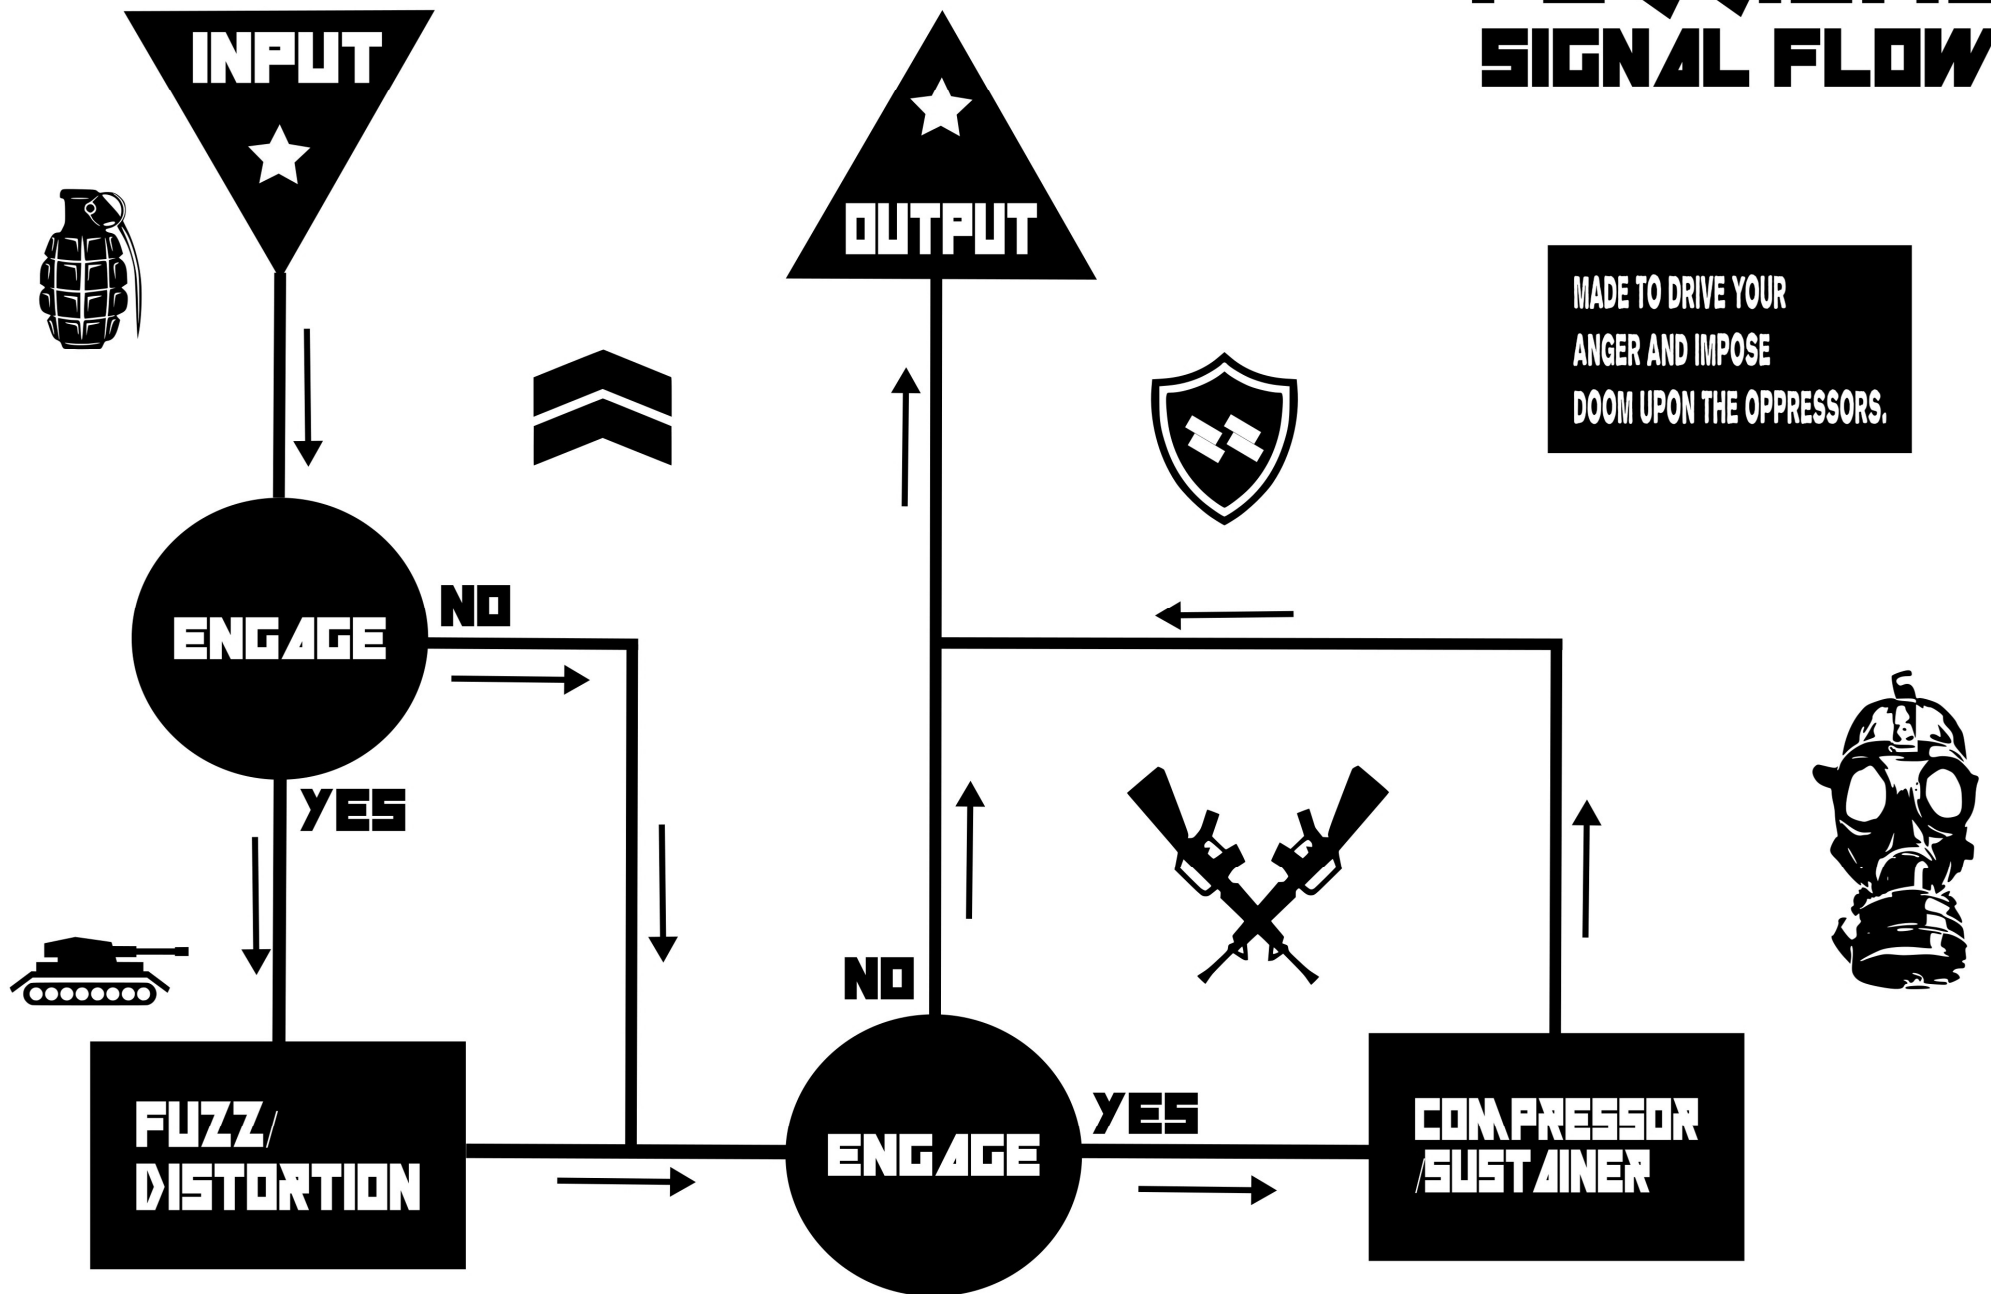

HOW TO CONNECT TUBE AMP

1. Get the small rectangle blue box in the package and get the tube amp out of it.

2. Hold it and align its pins directly to the tube amp socket hole position (see fig. 3).

3. Press the tube amp firmly but gently, with a slight wiggle until the pins are completely pushed into the holes.

4. Make sure that all the 9 pins of the tube amp are securely inside the holes. You must not see any part of the pins, just the tube glass round bottom on the socket's surface.

5. And you're done! After you have plugged the PSU in Fuzzismo's DC input, the tube amp is turned on. Wait 6-10 seconds before it takes effect. The tube amp needs to warm up first.

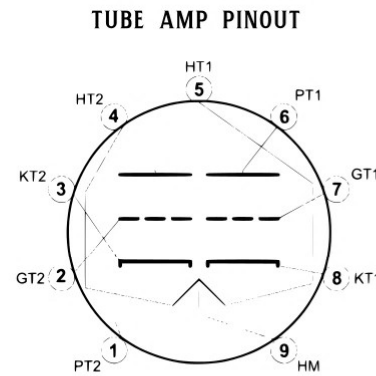


Fig. 2

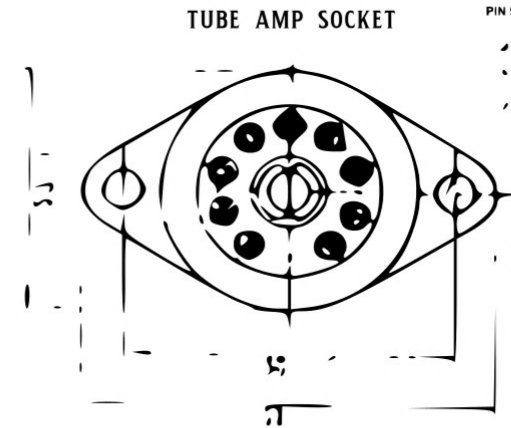
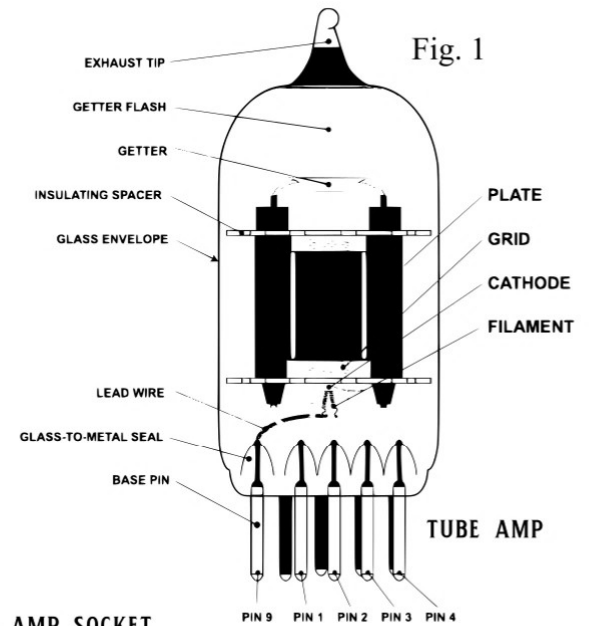


Fig. 3

DISCLAIMER:

FUZZISMO with PSU and its included tube amp are packed securely and properly before shipment. Please handle it with care specially the glass tube amp.

I will not take any responsibility whatsoever for any damages on the stompbox and/or the tube amp in case you break it, handled it incorrectly, inserted or removed the tube amp the wrong way on its socket, or during its shipment/delivery.

Specifications:		
Power Input	9v DC negative center	
Current Requirements	500mA (at least)	
DC Socket	2.1mm x 5.5mm female	
Input/Output Jacks	6.35mm or 1/4" mono	
Footswitch (2x)	True Bypass	
Vacuum Tube	Dual-Triode 6AV6 (9 pin)	
Aluminum Metal Case	145mm x 120mm x 40mm	

Note:

ALTHOUGH I PUT PROTECTIONS FOR THE CIRCUITS IN THE DEVICE, I DO NOT TAKE ANY RESPONSIBILITY FOR THE DAMAGES CAUSED BY WRONG POWER SUPPLY CONNECTION NOR APPLICATION.

ALWAYS CHECK THE PSU THAT YOU ARE USING TO POWER UP FUZZISMO, USE ONLY THE REQUIRED POWER SUPPLY VOLTAGES AND POLARITY.

CLM
CTU

P A R E N T A L
ADVISORY
EXPLICIT NOISE GEAR

FUZZ
ISMO



THANK YOU FOR PURCHASING FUZZISMO!



Less Drama More Gizmo

GENTHALZ

© all rights reserved - 2022

genthalz.com